


SIDEROAD DETAIL FOR HMA SHOULDERS

2' HMA SHOULDER SHALL AYOID SIDEROADS, SOUND CONCRETE ENTRANCES, CROSS WALKS, AND WHERE 2' SHOULDER EXISTS ALREADY

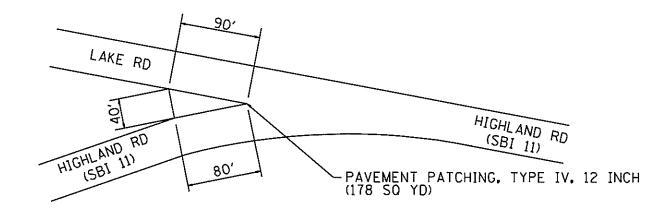

PAVEMENT PATCHING DETAIL

(NTS)

BINDER AND BITUMINOUS SURFACE TREATMENT SHALL BE PLACED ON TOP OF PAVEMENT PATCH. CONTRACTOR SHALL FIELD VERIFY DIMENSIONS AND DEPTH OF PATCH AND SUBMIT TO THE ENGINEER FOR APPROVAL PRIOR TO PLACING PATCH. QUANTITY BASED ON AN ESTIMATED 12 INCH DEEP PATCH AND APPROXIMATE MEASUREMENTS SHOWN.

FILE NAME = USER NAM	E = SUSERS DESIG	GNEO	REVISED	-
∍Filct4	DRAW	N	REVISED	·
PLOT SCA	LE * SCALES CHECK	KED	REVISEO	
PLOT DAT	E = 4DATES DATE		REVISEO	*

STATE	OF	ILLINOIS
DEPARTMENT (DF	TRANSPORTATION

SCALE:

			SECTION	COUNTY	TOTAL	SHEET NO.	
DETAILS		11	5-R5, 5-1-1	MADISON	10	10	
					CONTRACT NO. 76G40		
SHEET NO OF SHEETS	STA TO STA	FED. R	DAD DIST. NO (ILLINOIS FED	. AID PROJECT			